


Outdoor units

Multisystem

PRODUCT SHEET



Product certified by: 




FEATURES

Model	KAM2-42 DR7
Max. indoor units	2
Cooling capacity	4,10 kW
Cooling power input	1,27 kW
Heating capacity	4,39 kW
Heating power input	1,20 kW
Airflow	2.200 m ³ /h
Sound pressure	57 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Power wiring (outdoor)	(2+T)x2,50 mm ²
Communication wiring	(3+T)x2,50 mm ²
Max. input	12 A
Refrigerating pipes	2x Ø1/4" / 2x Ø3/8"
Refrigerant charge / Additional charge	0,90 kg / 0,012 kg
Max. pipe length	40 m
Max. pipe length (1 indoor unit)	15 m
Height difference between indoor and outdoor units	15 m
Height difference between indoor units	10 m

NOTES:


(1) The data and specifications present in this sheet may vary without notice.
 (2) The images on this sheet are indicative and may be different from the final machine.

WIRING DIAGRAM

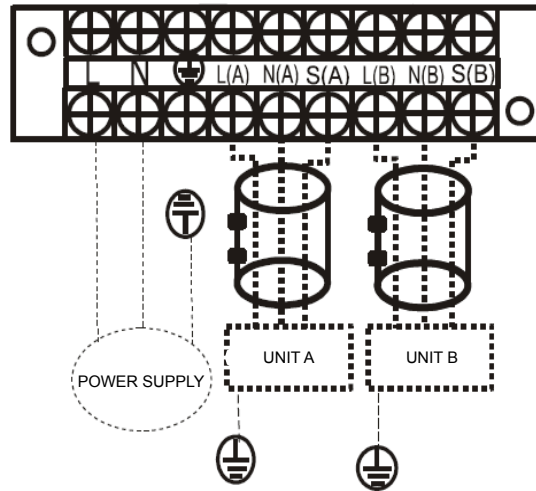


DIMENSIONS & WEIGHT OF OUTDOOR UNIT

Model	KAM2-42 DR7
A	800 mm
B	554 mm
C	333 mm
Weight	31,60 kg

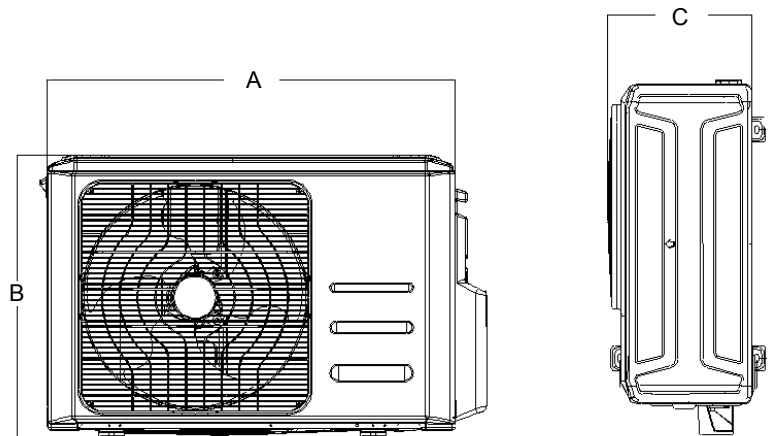

INSTALLATION

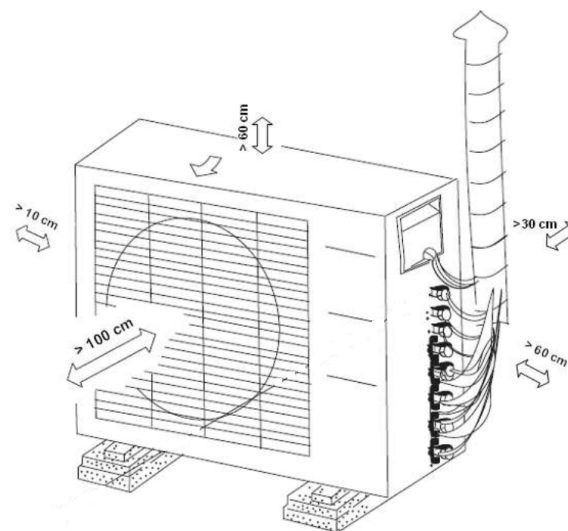


Outdoor units

Multisystem

PRODUCT SHEET



Product certified by: 




FEATURES

Model	KAM2-52 DR7.1
Max. indoor units	2
Cooling capacity	5,28 kW
Cooling power input	1,63 kW
Heating capacity	5,57 kW
Heating power input	1,50 kW
Airflow	2.200 m ³ /h
Sound pressure	56 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Power wiring (outdoor)	(2+T)x2,50 mm ²
Communication wiring	(3+T)x2,50 mm ²
Max. input	13 A
Refrigerating pipes	2x Ø1/4" / 2x Ø3/8"
Refrigerant charge / Additional charge	1,25 kg / 0,012 kg
Max. pipe length	40 m
Max. pipe length (1 indoor unit)	25 m
Height difference between indoor and outdoor units	15 m
Height difference between indoor units	10 m

NOTES:


(1) The data and specifications present in this sheet may vary without notice.
 (2) The images on this sheet are indicative and may be different from the final machine.

WIRING DIAGRAM

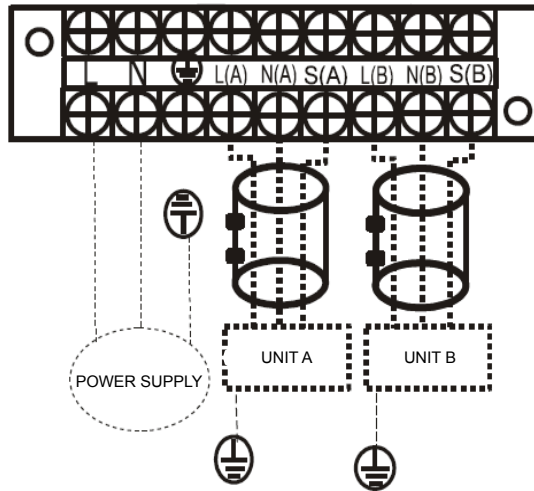


DIMENSIONS & WEIGHT OF OUTDOOR UNIT

Model	KAM2-52 DR7.1
A	800 mm
B	554 mm
C	333 mm
Weight	35,50 kg

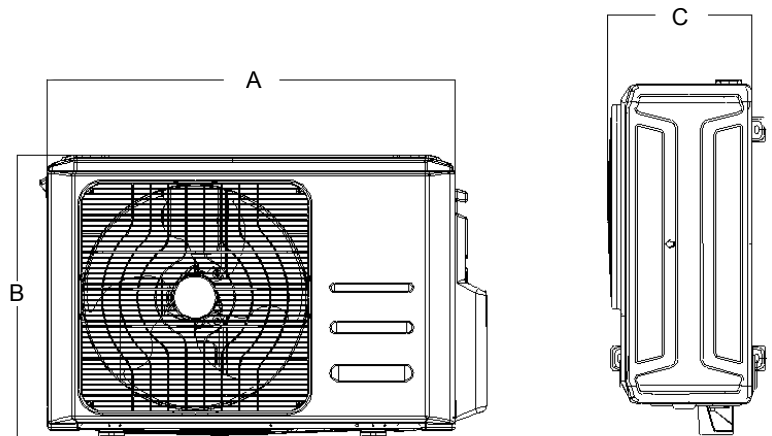

INSTALLATION

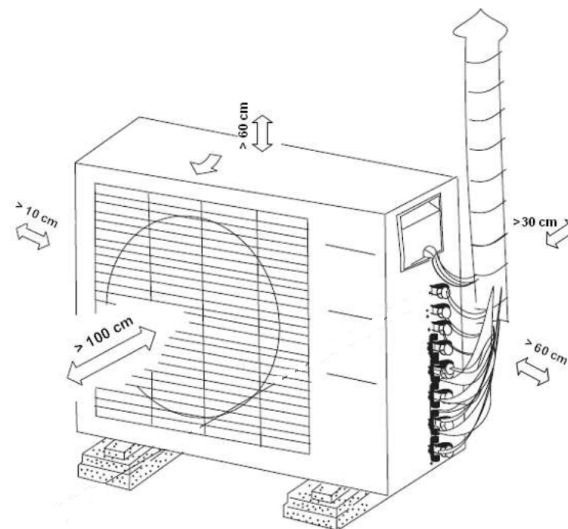


Outdoor units

Multisystem

PRODUCT SHEET



Product certified by: 



FEATURES


Model	KAM3-62 DR7
Max. indoor units	3
Cooling capacity	6,15 kW
Cooling power input	1,90 kW
Heating capacity	6,59 kW
Heating power input	1,77 kW
Airflow	3.000 m ³ /h
Sound pressure	57,50 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Power wiring (outdoor)	(2+T)x2,50 mm ²
Communication wiring	(3+T)x2,50 mm ²
Max. input	15 A
Refrigerating pipes	3x Ø1/4" / 3x Ø3/8"
Refrigerant charge / Additional charge	1,40 kg / 0,012 kg
Max. pipe length	60 m
Max. pipe length (1 indoor unit)	30 m
Height difference between indoor and outdoor units	15 m
Height difference between indoor units	10 m

NOTES:

(1) The data and specifications present in this sheet may vary without notice.


(2) The images on this sheet are indicative and may be different from the final machine.

WIRING DIAGRAM

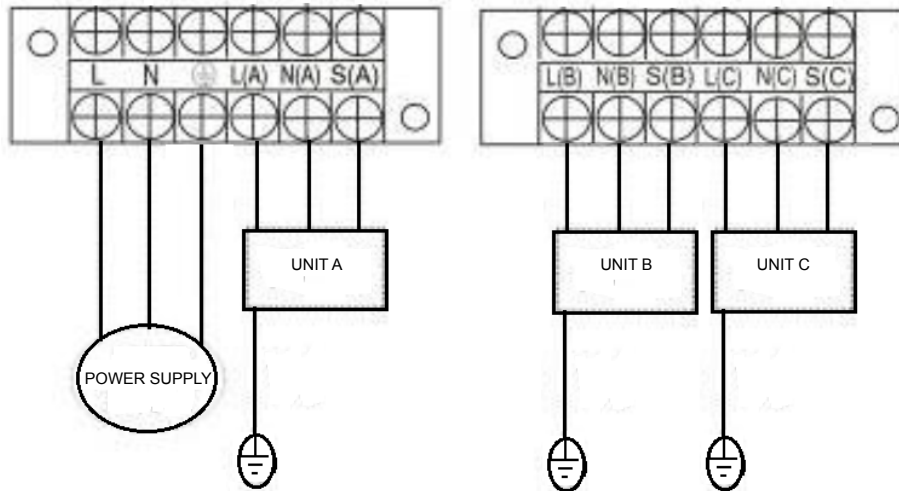


DIMENSIONS & WEIGHT OF OUTDOOR UNIT

Model	KAM3-62 DR7
A	845 mm
B	702 mm
C	363 mm
Weight	46,80 kg

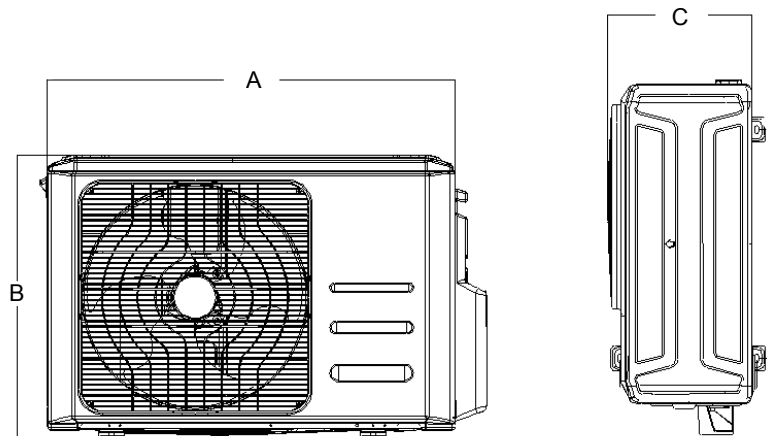

INSTALLATION

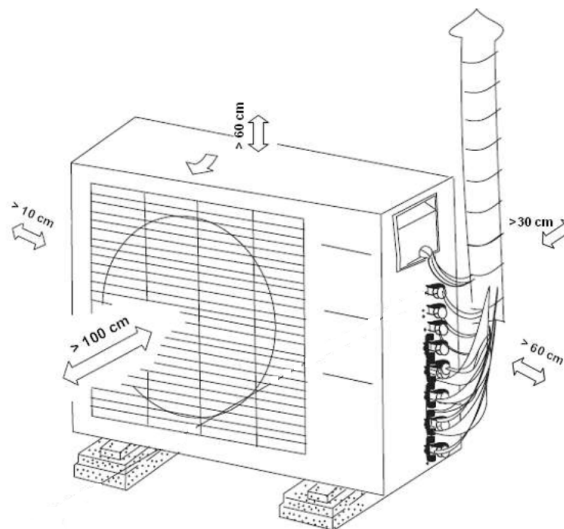


Outdoor units

Multisystem

PRODUCT SHEET



Product certified by: 




FEATURES

Model	KAM3-78 DR7.1
Max. indoor units	3
Cooling capacity	7,91 kW
Cooling power input	2,45 kW
Heating capacity	8,21 kW
Heating power input	2,20 kW
Airflow	2.700 m ³ /h
Sound pressure	54 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Power wiring (outdoor)	(2+T)x4 mm ²
Communication wiring	(3+T)x2,50 mm ²
Max. input	17,50 A
Refrigerating pipes	3x Ø1/4" / 3x Ø3/8"
Refrigerant charge / Additional charge	1,57 kg / 0,012 kg
Max. pipe length	60 m
Max. pipe length (1 indoor unit)	30 m
Height difference between indoor and outdoor units	15 m
Height difference between indoor units	10 m

NOTES:


(1) The data and specifications present in this sheet may vary without notice.
 (2) The images on this sheet are indicative and may be different from the final machine.

WIRING DIAGRAM

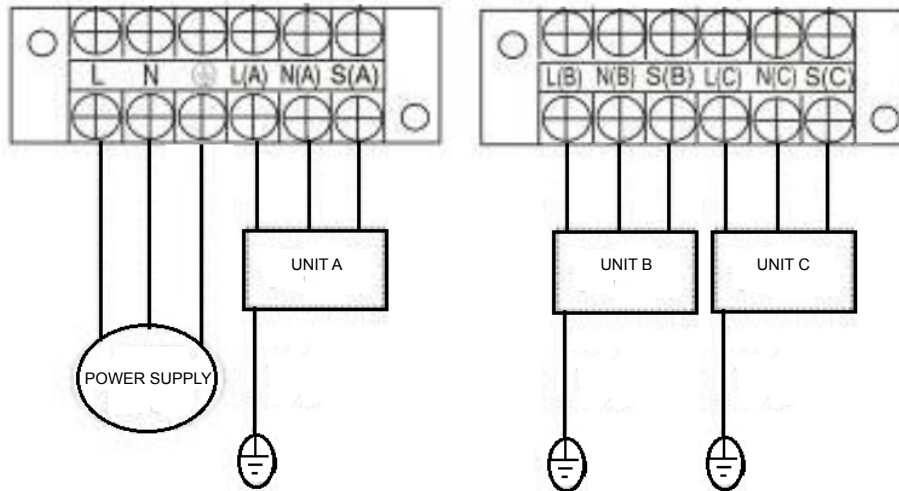


DIMENSIONS & WEIGHT OF OUTDOOR UNIT

Model	KAM3-78 DR7.1
A	845 mm
B	702 mm
C	363 mm
Weight	53 kg

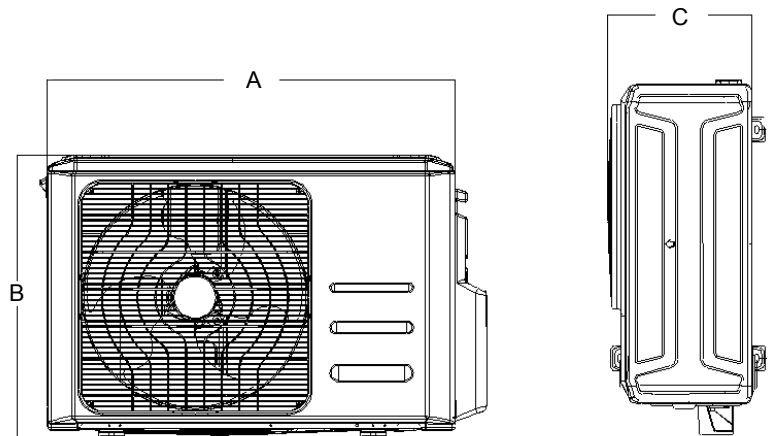

INSTALLATION

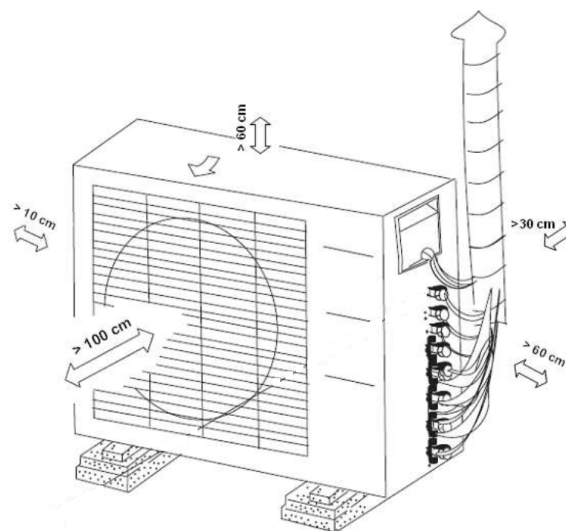


Outdoor units

Multisystem

PRODUCT SHEET



Product certified by: 




FEATURES

Model	KAM4-80 DR7
Max. indoor units	4
Cooling capacity	8,20 kW
Cooling power input	2,50 kW
Heating capacity	8,79 kW
Heating power input	2,40 kW
Airflow	3.800 m ³ /h
Sound pressure	61 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Power wiring (outdoor)	(2+T)x6 mm ²
Communication wiring	(3+T)x2,50 mm ²
Max. input	19 A
Refrigerating pipes	4x Ø1/4" / 3x Ø3/8" + 1x Ø1/2"
Refrigerant charge / Additional charge	2,10 kg / 0,012 kg
Max. pipe length	80 m
Max. pipe length (1 indoor unit)	35 m
Height difference between indoor and outdoor units	15 m
Height difference between indoor units	10 m

NOTES:


(1) The data and specifications present in this sheet may vary without notice.
 (2) The images on this sheet are indicative and may be different from the final machine.

WIRING DIAGRAM

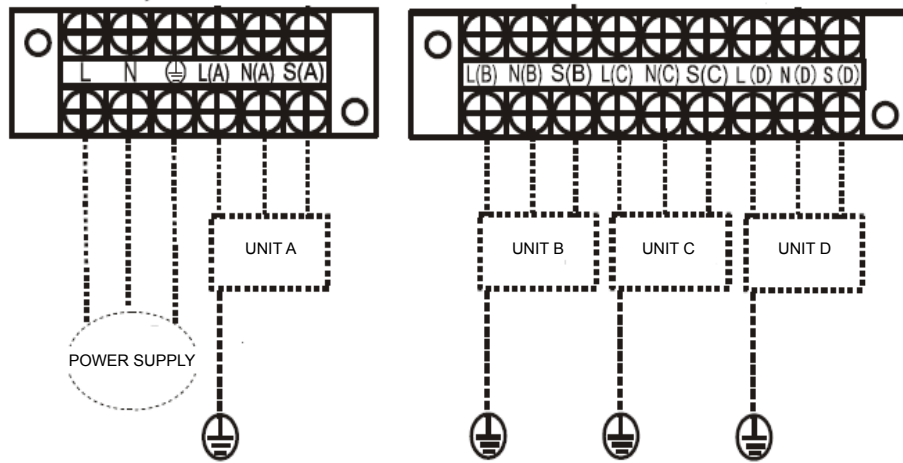


DIMENSIONS & WEIGHT OF OUTDOOR UNIT

Model	KAM4-80 DR7
A	946 mm
B	810 mm
C	410 mm
Weight	62,10 kg

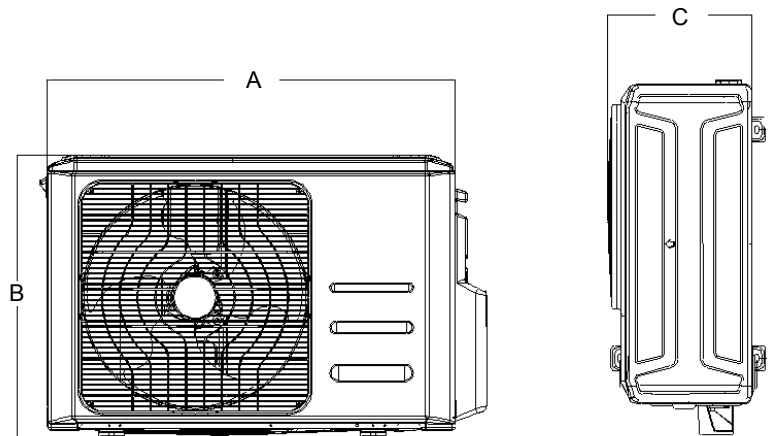

INSTALLATION

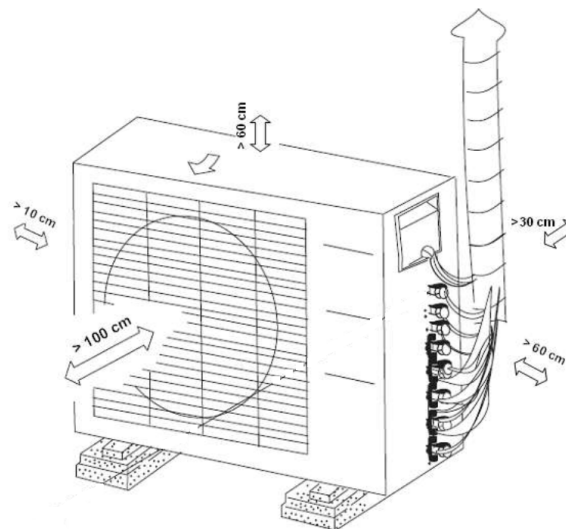


Outdoor units

Multisystem

PRODUCT SHEET



Product certified by: 




FEATURES

Model	KAM4-105 DR7
Max. indoor units	4
Cooling capacity	10,55 kW
Cooling power input	3,26 kW
Heating capacity	11,14 kW
Heating power input	2,84 kW
Airflow	4.000 m ³ /h
Sound pressure	63 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Power wiring (outdoor)	(2+T)x6 mm ²
Communication wiring	(3+T)x2,50 mm ²
Max. input	21,50 A
Refrigerating pipes	4x Ø1/4" / 3x Ø3/8" + 1x Ø1/2"
Refrigerant charge / Additional charge	2,10 kg / 0,012 kg
Max. pipe length	80 m
Max. pipe length (1 indoor unit)	35 m
Height difference between indoor and outdoor units	15 m
Height difference between indoor units	10 m

NOTES:


(1) The data and specifications present in this sheet may vary without notice.
 (2) The images on this sheet are indicative and may be different from the final machine.

WIRING DIAGRAM

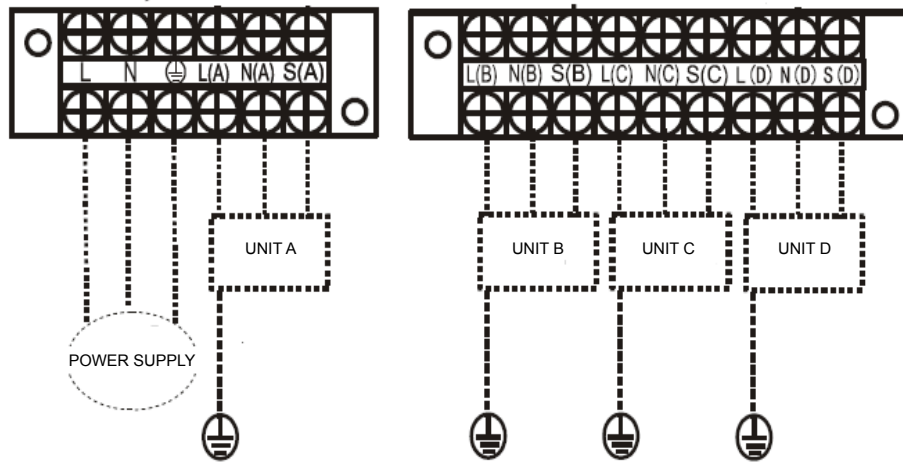


DIMENSIONS & WEIGHT OF OUTDOOR UNIT

Model	KAM4-105 DR7
A	946 mm
B	810 mm
C	410 mm
Weight	68,80 kg

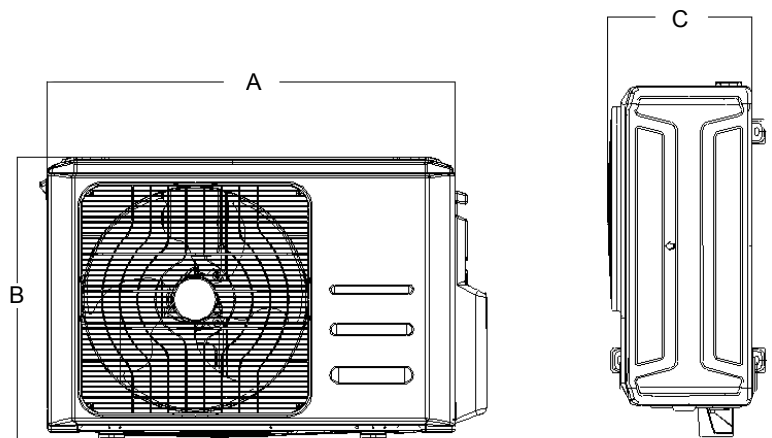

INSTALLATION

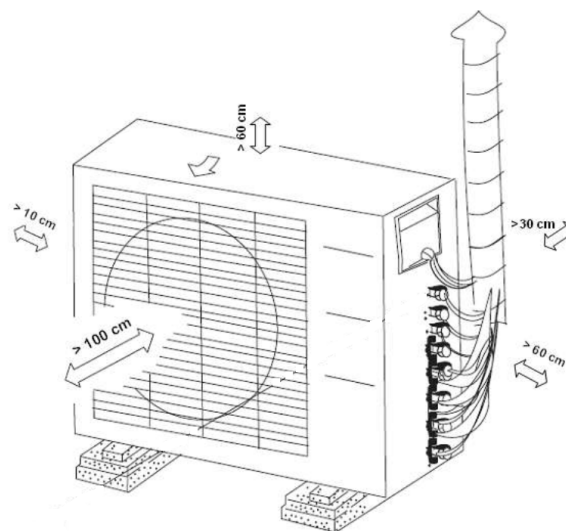


Outdoor units

Multisystem

PRODUCT SHEET



Product certified by: 




FEATURES

Model	KAM5-120 DR8
Max. indoor units	5
Cooling capacity	12,31 kW
Cooling power input	3,30 kW
Heating capacity	12,60 kW
Heating power input	3,30 kW
Airflow	3.850 m ³ /h
Sound pressure	62 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Power wiring (outdoor)	(2+T)x6 mm ²
Communication wiring	(3+T)x2,50 mm ²
Max. input	22 A
Refrigerating pipes	5x Ø1/4" / 4x Ø3/8" + 1x Ø1/2"
Refrigerant charge / Additional charge	2,90 kg / 0,012 kg
Max. pipe length	80 m
Max. pipe length (1 indoor unit)	35 m
Height difference between indoor and outdoor units	15 m
Height difference between indoor units	10 m

NOTES:


(1) The data and specifications present in this sheet may vary without notice.
 (2) The images on this sheet are indicative and may be different from the final machine.

WIRING DIAGRAM

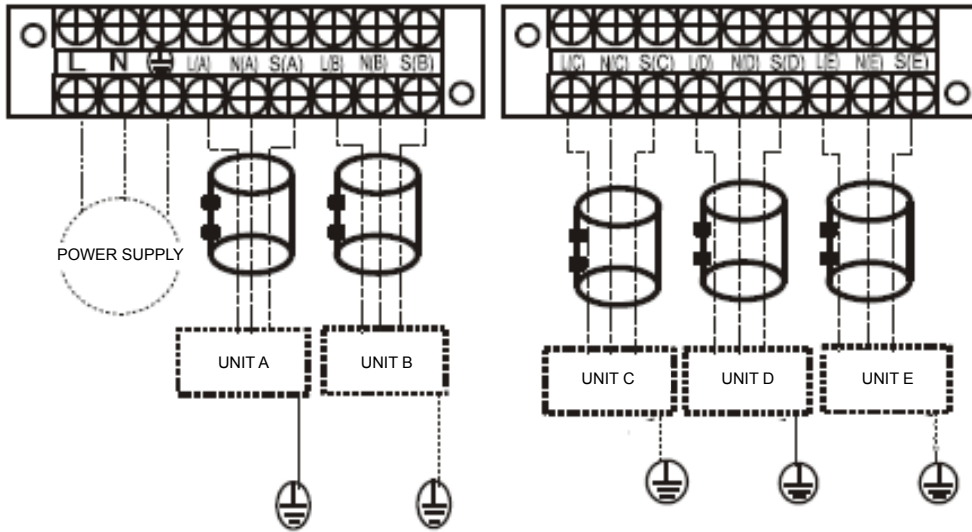

DIMENSIONS & WEIGHT OF OUTDOOR UNIT

Model	KAM5-120 DR8
A	946 mm
B	810 mm
C	410 mm
Weight	74,10 kg

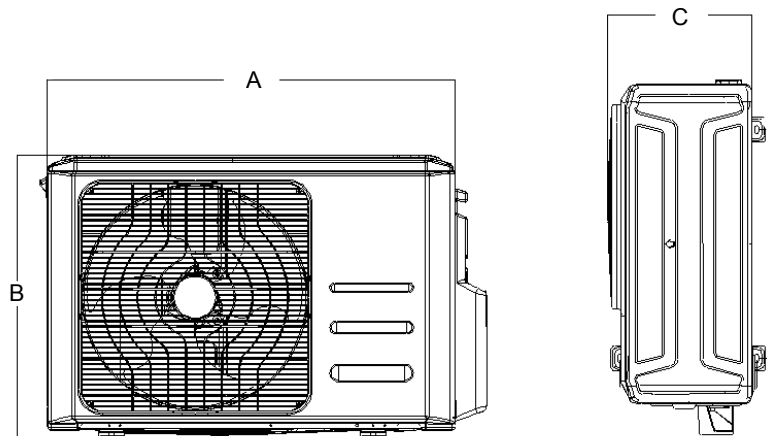

INSTALLATION

