


# Onnix

## PRODUCT SHEET



KID-05 S  
Standard controller

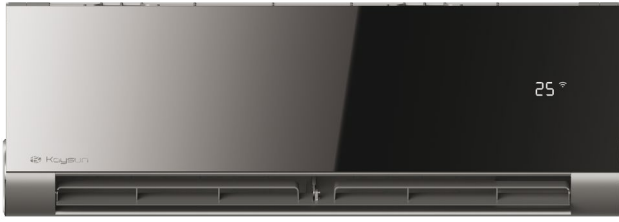


Product certified by:



## FEATURES

Model	AKAY-D 26 DR9	AKAY-D 35 DR9
Cooling capacity	2,64 kW	3,52 kW
Cooling power input	613 W	1.034 W
Heating capacity	2,93 kW	3,81 kW
Heating power input	637 W	1.027 W
ErP Classification cold/heat	A+++ / A++	A+++ / A++
Airflow (indoor)	384/478/558 m <sup>3</sup> /h	384/478/558 m <sup>3</sup> /h
Sound pressure (indoor)	24 dB(A)	24 dB(A)
Airflow (outdoor)	2.200 m <sup>3</sup> /h	2.200 m <sup>3</sup> /h
Sound pressure (outdoor)	54 dB(A)	54 dB(A)
Power supply	220-240 V / 1 / 50 Hz	220-240 V / 1 / 50 Hz
Power wiring (outdoor)	(2+T)x1,50 mm <sup>2</sup>	(2+T)x1,50 mm <sup>2</sup>
Communication wiring	(4+T)x1,50 mm <sup>2</sup>	(4+T)x1,50 mm <sup>2</sup>
Refrigerating pipes	Ø1/4" / Ø3/8"	Ø1/4" / Ø3/8"
Refrigerant charge / Additional charge	0,62 kg / 0,012 kg	0,62 kg / 0,012 kg
Max. pipe length	25 m	25 m
Max. level difference	10 m	10 m

## WIRING DIAGRAM

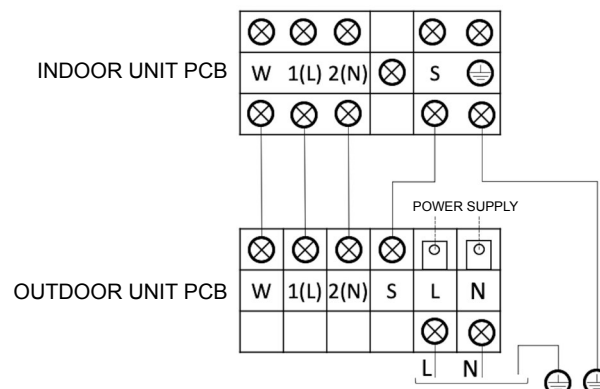


NOTES:

- (1) The data and specifications present in this sheet may vary without notice.  
 (2) The images on this sheet are indicative and may be different from the final machine.

## DIMENSIONS & WEIGHT OF INDOOR UNIT

Model	Weight	W	H	D
<b>KAY-D 26 DR9</b>	10,50 kg	897 mm	312 mm	182 mm
<b>KAY-D 35 DR9</b>	10,50 kg	897 mm	312 mm	182 mm

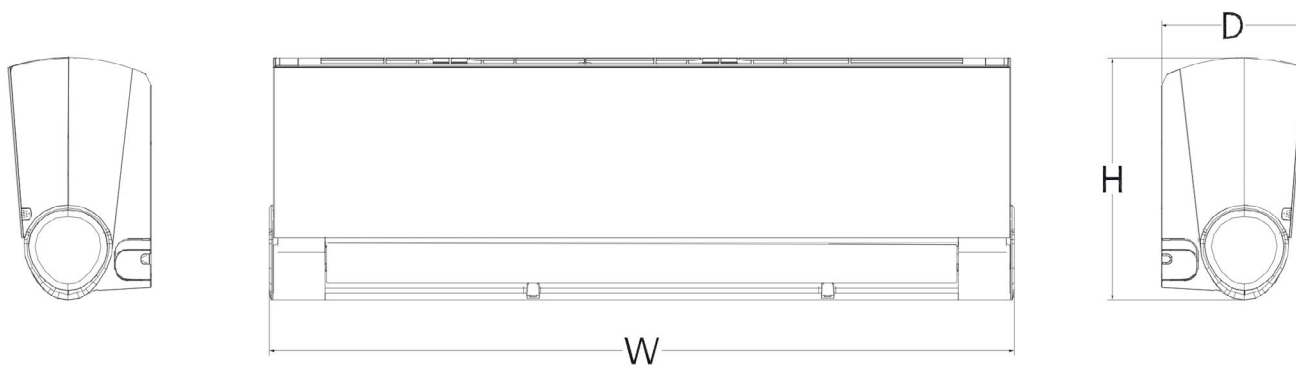

## DIMENSIONS & WEIGHT OF OUTDOOR UNIT

Model	Weight	Width	Height	Depth
<b>KAE-35 DR9</b>	26,70 kg	765 mm	555 mm	303 mm
<b>KAE-35 DR9</b>	26,70 kg	765 mm	555 mm	303 mm

